

## Flexible Flat Cables

### 0.30mm Pitch Flexible Flat Cable


#### PRODUCT DETAILS

Flex Connection provides a wide range of interconnect solutions utilizing the latest Flexible Flat Cable Technology. We produce standard pitch product from 0.30mm to 2.54mm with options including Shielding, Folding, Gold Plating, Printing or Labeling, Hi Flex Ratings, Hi Temp Ratings and industry standard termination styles. Our product specialists will be pleased to support your individual application requirements with cables designed to meet your specific needs.

#### FEATURES

-  Highly Flexible
-  Light Weight
-  Extremely Thin
-  Cost-Effective
-  Wide Temperature Range
-  Suitable to Fold
-  Can be Shielded
-  Quality Design

#### DIMENSION OUTLINE

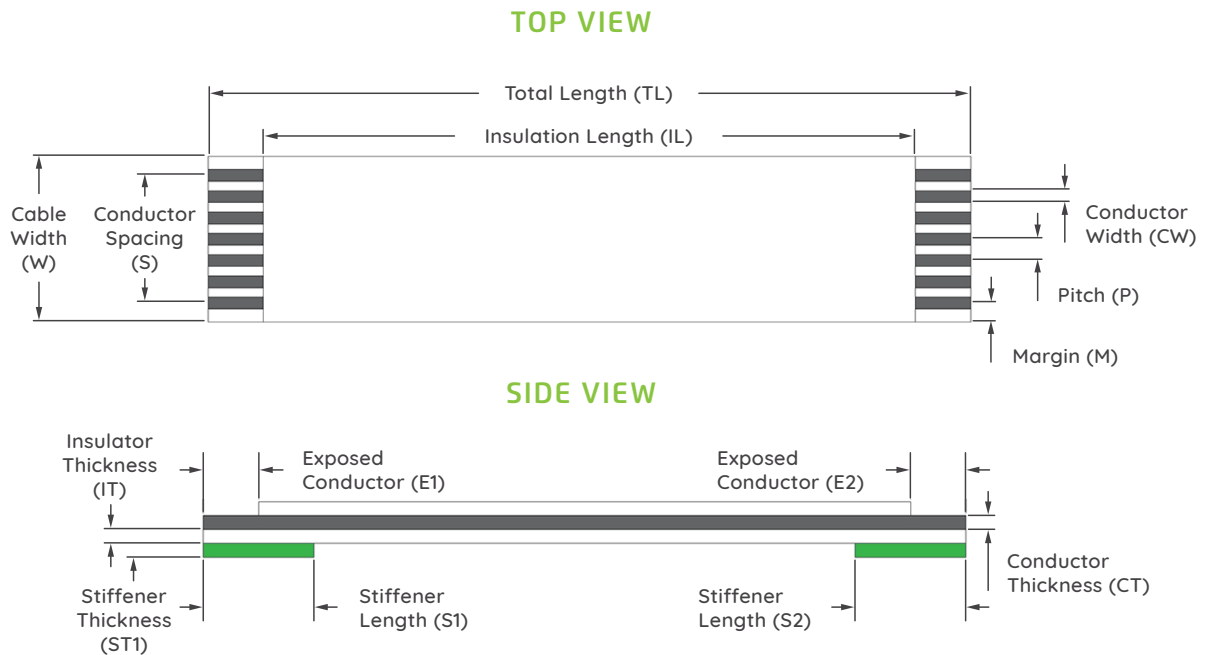

#### STANDARD STYLE OPTIONS

Style CO 

Style CR 

Style AO 

Style AR 

Style BO 

Style BB 

For other styles please consult our sales office


## ELECTRICAL AND MECHANICAL PROPERTIES

Material	Tin Plated Copper Conductor laminated between 2 layers of Polyester Insulation
Pitch	0.30mm ±0.05
Number of Conductors	11-99
Conductor Size	0.05 x 0.2mm (standard)
Cable Thickness	0.136mm
Insulation Thickness	0.043mm
Insulation Material	White Polyester (standard) or Yellow Polyimide (special request)
Conductor Resistance	Less than 2.2Ω/M
Insulation Resistance	≥100MΩ
Operating Voltage (max)	60V
Current Rating (max)	1.5A
Dielectric Strength	500V AC
Operating Temperature	-30°C to 80°C as Standard
UL Flammability Rating	VW-1
Flexible Life	>3M Cycle @ 15mm Bend Radius


## OPTIONS



Black Insulator



Gold Plating



Shielding



Printing or Labeling

## PART NUMBERING BREAKDOWN

