


2.54mm Flat Flex Jumper Cable

Female to Female

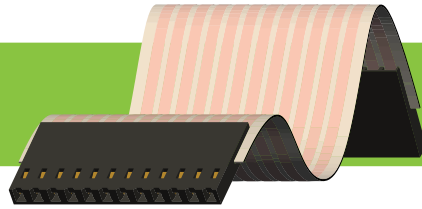

PRODUCT DETAILS

The Flex Connection range of Flat Flex Jumper Cables are manufactured with Flexible Flat Cables (FFCs) produced by laminating bare copper conductors between 2 layers of tough, flexible flame retardant UL VW-1 rated polyester insulators. We terminate either end of the Jumper Cable with connectors from leading manufacturers such as Memcon, Tyco, Nicomatic and others. Flex Connection Jumpers provide high reliability and retention compared to traditional FFCs used with ZIF/LIF products with low contact resistance and high current options while maintaining a high level of flexibility.

FEATURES

- Highly Flexible
- Light Weight
- Extremely Thin
- Quality Design
- Suitable to Fold

APPLICATIONS


- | | |
|----------------------|------------------|
| Domestic Appliance | IT Equipment |
| Consumer Electronics | Office Equipment |
| Automotive Industry | Robotics |
| Medical Applications | Industrial |
| Telecommunications | |

MATING CONNECTOR




PCB Header MSPTAS Series


DIMENSION OUTLINE

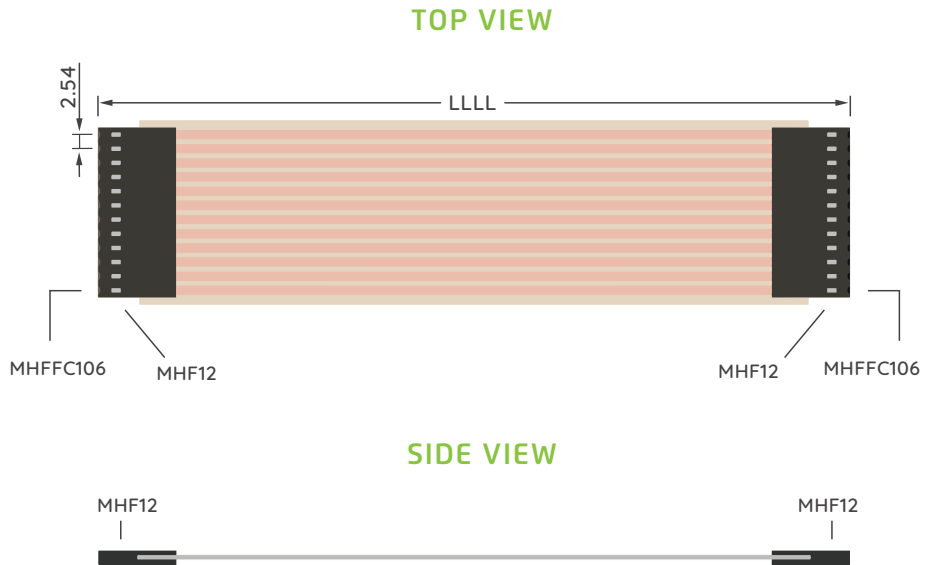

CONTACT AND HOUSING OPTIONS




High Force Female Contact




Low Force Female Contact



Full or Selective Gold Plating



Short Male Solder Tab




Polarised and Locking Housing


ELECTRICAL AND MECHANICAL PROPERTIES

Flat Cable Material	Flat Copper Conductors laminated between 2 layers of White Polyester Insulation
Housing Style	MHF Standard Housing
Housing Material	Thermoplastic with Glass Fibre UL94 VO Rated
Contact Style	MHFFC106T Hi Flex Contact
Contact Material	0.20mm thick Phosphor Bronze
Pitch	2.54mm
Number of Conductors	2 to 26 ways as standard
Conductor Size	1.57mm (width) x 0.076mm thick bare copper
Conductor Rating	3A AC / Conductor
Operating Voltage	300V RMS
Dielectric Strength	Over 1000 M Ω /M @2000VDC (20 deg C)
Resistance	<0.2 Ω /M


OTHER OPTIONS




FOLDING



SHIELDING



LABELING



SLEEVEING

PART NUMBERING BREAKDOWN

